

PRODUCT DATASHEET

Last information update: May 2023




SERRA MINI

0823W10

Architectural LED floodlight for outdoor applications

Technical Features

Power	10W
Input voltage	DC24V (constant voltage)
Insulation class	III
Delivered flux	450 lm ±10%
Light distribution type	symmetrical / elliptical
Beam angle	9°, 15°, 20°, 30°, 45° / 15°x60°
Light colour / CCT	RGBW
CRI	-
Source type	LED (4-IN-1)
LED number	1
MacAdam step	-
Power supply	Not included
Control	DMX512
Protection index	IP66
Impact resistance	IK08
Lifetime	50,000 hours Ta=25°C



Construction

Fluorocarbon painted die-cast aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation


Surface mounted with adjustable base.

Finish Colours








RAL9023 as standard colour, other RAL colours on request.

Wiring

Power/DMX input cable MALE connector 500mm

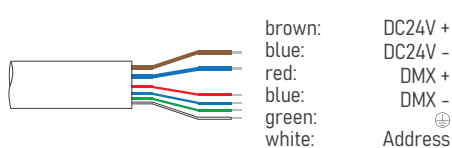

Optional Accessories

	anti-glare accessory for improved visual comfort *can not be ordered separately	honeycomb	
	anti-glare accessory for improved visual comfort *can not be ordered separately	anti-glass glass	
	mounting accessory for Ø 60~200mm trees *can not be ordered separately		strap
	mounting accessory *can not be ordered separately		spike
	with female 6-pin waterproof connector for Power/DMX * specify cable length to complete order	leader cable	

Ordering Information

example: 0823W10.0009.4130K.01+A1

0823W10 · [] · [] · [] + []

product	beam angle	light colour / CCT	finish colour	accessory
SERRA MINI 10W	0009 9°	4130K RGB+3000K	01 RAL9023	A1 honeycomb
	0015 15°	4140K RGB+4000K		A2 anti-glare glass
	0020 20°			A3 strap
	0030 30°			A4 spike
	0045 45°			LC6 leader cable
	1560 15°x60°			