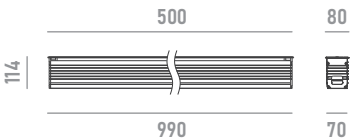


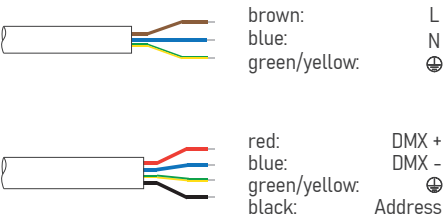
PRODUCT DATASHEET

Last information update: Mar. 2025



Wiring

Power input cable OPEN END 1,000 mm
DMX input cable MALE connector 1,000 mm
DMX output cable FEMALE connector 1,000 mm



DAN LITE

1917W24(0.5)

Adjustable in-ground LED wallwasher for outdoor applications

Technical Features

Power	24W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	1,080 lm ±10%
Light distribution type	Symmetrical / elliptical
Beam angle	20°, 45°, 60° / 15°x25°, 15°x60°
Light colour / CCT	RGBW
CRI	-
Source type	LED (4-IN-1)
LED number	12
MacAdam step	-
Power supply	Built-in
Control	DMX512 (built-in DMX decoder)
Protection index	IP67
Impact resistance	IK10
Lifetime	50,000 hours Ta=25°C

Construction

Aluminum body, stainless steel trim, tempered glass cover, PC optical lenses, aluminum recessed box.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C






Installation

Ground recessed with recessed box (standard).

Finish Colours

Trim in Stainless Steel (standard). Other RAL colours on request.

Optional Accessories

	honeycomb louvre *can not be ordered separately	A02
	anti-glare grille *can not be ordered separately	A03
	anti-slip glass *can not be ordered separately	A18
	leader cable with female 4-pin waterproof connector for Power/DMX * specify cable length to complete order	LC4
	extension cable with male and female 4-pin waterproof connector for Power/DMX * specify cable length to complete order	EC4

Ordering Information

example: 1917W24(0.5).0020.4130K.01+A02

1917W24(0.5) · · · +

product	beam angle		light colour / CCT		finish colour		accessory	
DAN LITE 24W (500MM)	0020	20°	4130K	RGB+3000K	01	stainless steel	A02	honeycomb louvre
	0045	45°	4140K	RGB+4000K			A03	anti-glare grille
	0060	60°					A18	anti-slip glass
	1525	15°x25°					LC4	leader cable
	1560	15°x60°					EC4	extension cable