


PRODUCT DATASHEET

Last information update: Mar. 2025

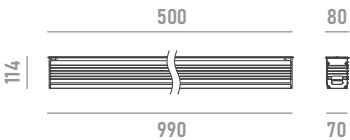

DAN LITE

1917W28(0.5)

Adjustable in-ground LED wallwasher for outdoor applications

Technical Features

Power	28W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	2,240 lm ±10%
Light distribution type	Symmetrical / elliptical
Beam angle	8°, 12°, 20°, 30°, 45°, 60° / 10°x70°, 15°x30°
Light colour / CCT	2700K, 3000K, 4000K
CRI	80
Source type	LED
LED number	12
MacAdam step	5
Power supply	Built-in
Control	ON/OFF
Protection index	IP67
Impact resistance	IK10
Lifetime	50,000 hours Ta=25°C

Construction

Aluminum body, stainless steel trim, tempered glass cover, PC optical lenses, aluminum recessed box.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation

Ground recessed with recessed box (standard).

Finish Colours


Trim in Stainless Steel (standard). Other RAL colours on request.

Wiring

Power input cable OPEN END 1,000 mm




Optional Accessories




honeycomb louvre
*can not be ordered separately

A02



anti-glare grille
*can not be ordered separately

A03



anti-slip glass
*can not be ordered separately

A18

Ordering Information

example: 1917W28(0.5).0008.2780.01+A02

1917W28(0.5) · [] · [] · [] + []

product	beam angle		light colour / CCT		finish colour	accessory	
DAN LITE 28W (500MM)	0008	8°	2780	2700K RA80	01 stainless steel	A02	honeycomb louvre
	0012	12°	3080	3000K RA80		A03	anti-glare grille
	0020	20°	4080	4000K RA80		A18	anti-slip glass
	0030	30°					
	0045	45°					
	0060	60°					
	1070	10°x70°					
	1530	15°x30°					