


PRODUCT DATASHEET

Last information update: Mar. 2025

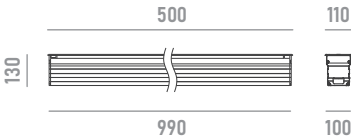

DAN LITE

1913W50(0.5)

Adjustable in-ground LED wallwasher for outdoor applications

Technical Features

Power	50W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	2,500 lm ±10%
Light distribution type	Symmetrical
Beam angle	Ultra spot 3°
Light colour / CCT	2700K, 3000K, 4000K
CRI	80
Source type	LED
LED number	10
MacAdam step	5
Power supply	Built-in
Control	ON/OFF
Protection index	IP67
Impact resistance	IK10
Lifetime	50,000 hours Ta=25°C

Construction

Aluminum body, stainless steel trim, tempered glass cover, PC optical lenses, aluminum recessed box.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation

Ground recessed with recessed box (standard).

Finish Colours


Trim in Stainless Steel (standard). Other RAL colours on request.

Wiring

Power input cable OPEN END 1,000 mm




Optional Accessories




honeycomb louvre
*can not be ordered separately

A02



anti-glare grille
*can not be ordered separately

A03



anti-slip glass
*can not be ordered separately

A18

Ordering Information

example: 1913W50(0.5).0003.2780.01+A02

1913W50(0.5) · [] · [] · [] + []

product	beam angle	light colour / CCT	finish colour	accessory
DAN LITE 50W (500MM) ultra spot	0003 3°	2780 2700K RA80	01 stainless steel	A02 honeycomb louvre
		3080 3000K RA80		A03 anti-glare grille
		4080 4000K RA80		A18 anti-slip glass